

3.0-3.5t T series mast: (Pneumatic)

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	3.0t	3.5t	FWD	BWD	Load capacity at 500mm				
				Without backrest	With backrest							Single tire		Double tire		
			mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg		
Wide view 2-stage mast	2W300	3000	2025	3570	4250	120	120	440	440	6	12	3000	3500	3000	3500	
	2W330	3300	2145	3690	4370	120	120	440	440	6	12	3000	3500	3000	3500	
	2W350	3500	2245	3890	4570	120	120	440	440	6	12	3000	3500	3000	3500	
	2W360	3600	2295	3990	4670	120	120	440	440	6	12	3000	3500	3000	3500	
	2W400	4000	2495	4040	4720	120	120	440	440	6	12	2850	3250	3000	3500	
	2W430	4300	2645	4340	5020	120	120	440	440	6	6	2700	3000	2900	3400	
	2W450	4500	2745	4290	4970	120	120	440	440	6	6	2550	2850	2850	3350	
Full free 2-stage mast	2F300	3000	2080	2620	3300	1460	810	440	440	6	12	3000	3500	3000	3500	
	2F330	3300	2230	3870	4550	1610	960	440	440	6	12	3000	3500	3000	3500	
Full free 3-stage mast	3F430	4300	2000	5570	4910	1360	730	460	460	6	6	2550	2550	2850	3350	
	3F450	4500	2080	5750	5070	1460	810	460	460	6	6	2400	2400	2700	3200	
	3F480	4800	2125	6050	5375	1565	915	460	460	6	6	2250	2250	2550	2900	
	3F500	5000	2270	6250	5570	1610	960	460	460	6	6	2100	2100	2400	2750	
	3F550	5500	2350	6830	6150	1770	1120	460	460	3	6	1650	1650	2250	2550	
	3F600	6000	2770	7250	6570	2020	1370	460	460	3	6	1200	1200	2100	2300	



Note: With sideshift minus 200Kg, with integral sideshift minus 150Kg.

6600-7700lb series mast: (Pneumatic)

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	6600lb	7700lb	FWD	BWD	Load capacity at 20 inch				
				Without backrest	With backrest							Single tire		Double tire		
			inch	inch	inch	inch	inch	inch	Deg	Deg	lb	lb	lb	lb		
Wide view 2-stage mast	2W300	118	80	141	167	4.7	4.7	17.3	17.3	6	12	6600	7700	6600	7700	
	2W330	130	84	145	172	4.7	4.7	17.3	17.3	6	12	6600	7700	6600	7700	
	2W350	138	88	153	180	4.7	4.7	17.3	17.3	6	12	6600	7700	6600	7700	
	2W360	142	90	157	184	4.7	4.7	17.3	17.3	6	12	6600	7700	6600	7700	
	2W400	157	98	159	186	4.7	4.7	17.3	17.3	6	12	6300	7200	6600	7700	
	2W430	169	104	171	198	4.7	4.7	17.3	17.3	6	6	6000	6600	6400	7500	
	2W450	177	108	169	196	4.7	4.7	17.3	17.3	6	6	5600	6300	6300	7400	
Full free 2-stage mast	2F300	118	82	103	130	57	32	17.3	17.3	6	12	6600	7700	6600	7700	
	2F330	130	88	152	179	63	38	17.3	17.3	6	12	6600	7700	6600	7700	
Full free 3-stage mast	3F430	169	79	219	193	54	29	18.1	18.1	6	6	5600	5600	6300	7400	
	3F450	177	82	226	200	57	32	18.1	18.1	6	6	5300	5300	6000	7100	
	3F480	189	84	238	212	62	36	18.1	18.1	6	6	5000	5000	5600	6400	
	3F500	197	89	246	219	63	38	18.1	18.1	6	6	4600	4600	5300	6100	
	3F550	217	93	269	242	70	44	18.1	18.1	3	6	3600	3600	5000	5600	
	3F600	236	109	285	259	80	54	18.1	18.1	3	6	2600	2600	4600	5100	

Note: With sideshift minus 440lb, with integral sideshift minus 330lb.

LOAD CAPACITY CHART 2-stage mast

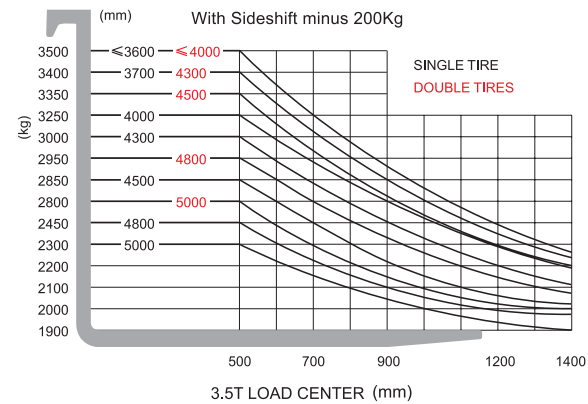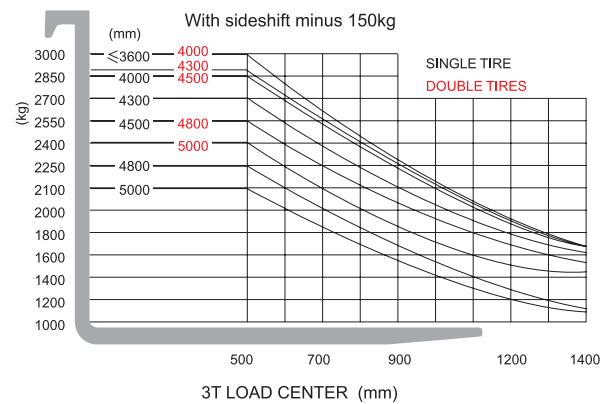

LOAD CAPACITY CHART 2-stage mast

